

# COMPACT 22 AF TANK - AIRFLOW



STEELWORKS AND FOUNDRIES




CEMENT



POWER PLANTS



HEAVY INDUSTRY

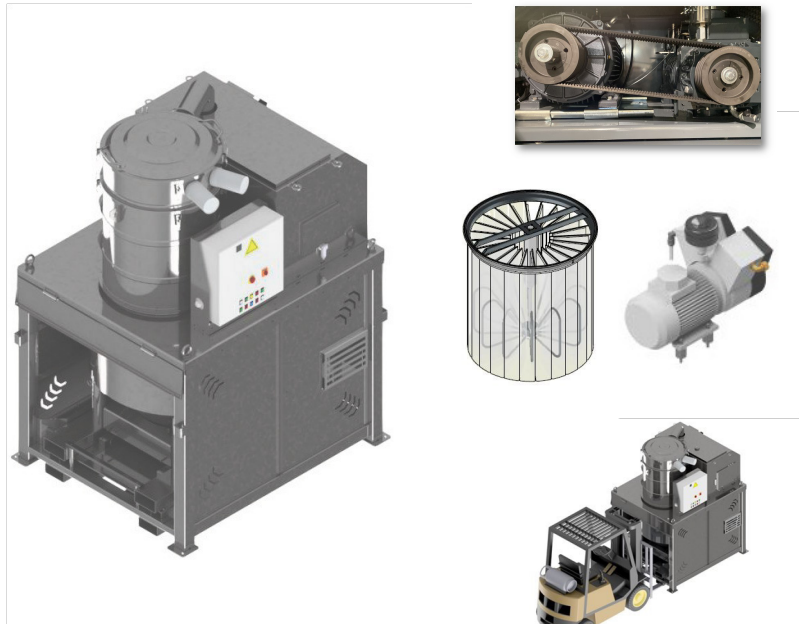

- ✓ Sturdy vacuum cleaner for intensive use
- ✓ Powerful lobe pump with electric motor
- ✓ High performances and long-lasting equipment
- ✓ High efficiency filtration
- ✓ Semi-automatic filter cleaning system
- ✓ Easy to handle
- ✓ Detachable container with fork lift intakes which make it is easy to handle
- ✓ Discharge system by means of a valve
- ✓ Great autonomy of the system
- ✓ High-performance compact vacuum unit for heavy industry, forklift movable

## SUCTION UNIT

Voltage	V - Hz	400 - 50 3~
Power	kW	22
Electrical protection	IP	55
Max water lift	mmH <sub>2</sub> O	5000
Max air flow	m <sup>3</sup> /h	1300
Suction inlet	mm	127

## FILTER UNIT

Filter Type	Star , Polyester ANT M (Teflon coated)	
Surface - Diameter	cm <sup>2</sup> -mm	120.000 - 780
Material - Efficiency	IEC 60335-2-69	Polyester - ANT M
Cleaning system	Automatic	
Secondary filter	Cartridge	
Surface	cm <sup>2</sup>	40.000
Air load on filter	m <sup>3</sup> /m <sup>2</sup> /h	108 - 92

## COLLECTION UNIT

Capacity	l	1000
----------	---	------

## VOLUME

Dimensions	cm	196x163x272h
Weight	kg	1800

COPYRIGHT © 2023 DELFIN S.R.L. ALL RIGHTS RESERVED  
COPYRIGHT © 2023 DELFIN S.R.L. TUTTI I DIRITTI RISERVATI



## SUCTION UNIT

The suction unit is provided with a volumetric vacuum pump with tri-lobe rotors which can reach very high airflow and waterlift levels

A safety filter guarantees the maximum protection for both motor and pump



## FILTER UNIT

The large surface star filter, located inside the filter stainless steel chamber, is made of polyester and provides high resistance against clogging and passage of fine dust. The filter is equipped with a semiautomatic cleaning system handled by the operator. A pneumatic cylinder shakes the star filter by a vertical shaking movement which causes the detachment of dusts and wastes from the filter. This way, the operator will be able to decide without any limits when to turn the vacuum cleaner off and to clean the filter. The vacuum cleaner is equipped with a compressor which guarantees the autonomy of the machine.



## COLLECTION UNIT

Forklift intakes for easy discharge.

The material is collected into a capacious and detachable container, which is easy to handle thanks to fork lift intakes

The material is safely and quickly discharged by means of a lever

The unit is manufactured with thick painted steel for improved sturdiness and long-lasting lifetime



## OPTIONALS

- ✓ REMOTE CONTROL
- ✓ POWER CABLE AND PLUG
- ✓ LEVEL SENSORS
- ✓ PTFE COATED FILTER CLASS M

